

## R4i-SDHC 3DS v3.0 Upgrade White screen error fix (due to v1.49b)

1. Please prepare a NDSL console, workable flash cart and the r4i-sdhc flash cart with white screen problem.



2. Download white screen fix software, unzip it and copy to the root directory of SD card.

White screen fix software download from: <http://www.r4i-sdhc.com/FixWhiteScreen3dsv30.rar>

moonmemo	
moonsh12	
R4iMenu	
FixWhiteScreen3dsv30.nds	292 KB
R4.dat	576 KB
DEMONO.SYS	9 KB
SWRESET.SYS	1 KB


3. Plug-in the any workable flash cart to NDSL.



4. Go-to the “GAMES” menu.



5. Execute the “FixWhiteScreen3dsv30”, screen below will pop-up.

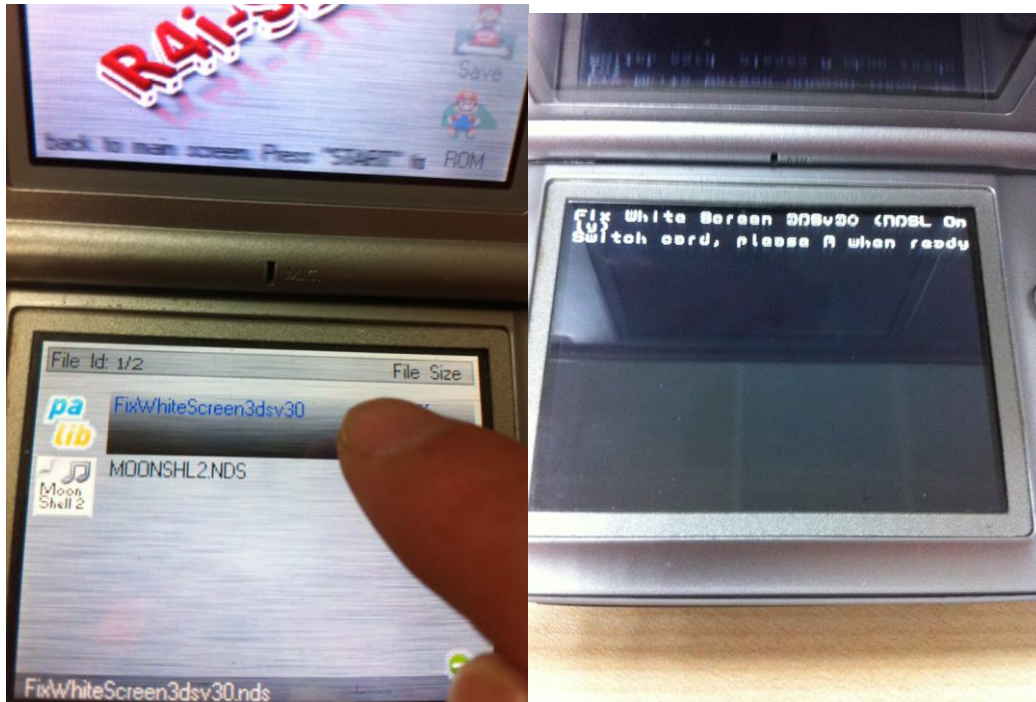

6. Do not shut down the power of the console. Replace the working flash cart with the problem r4i-sdhc white screen flash cart. Then press button “A” to start repairing. **Attention: Do not insert micro SD card to the problem r4i-sdhc white screen flash cart during upgrading.**





7. Repairing program start, makes sure NDSL console has enough power, and **do not remove the flash cart during repairing process.**



8. After couples minutes of waiting, once repairing done, used the v1.50b kernel to run 3DS V3.0

